

Cleaning instructions Disassembly instructions

CAUTION! For a correct cleaning process, please follow the instructions below. Before getting started, make sure that the machine is unplugged from mains power.



1 Take off the feeder **basket**.



2 Take off the **feeder plate** by unscrewing the central knob.



3 Take off the **Pulp cover**.



4 Turn the knobs towards us counterclockwise to their vertical position and extract the side outlets.



5 Turn the knobs 90° degrees until they are aligned with the holes in the cover. Then extract it.



6 Take off the **automatic PulpOut System**, by lifting the assembly with the part closest to you.



7 Remove the **Speed Up Tap** by easily unscrewing it.



8 Remove the stainless-steel **peel guides**.



9 Press the side tabs to remove **the bin**.



10 Remove **the blade** by pressing on the centre and pulling the handle towards you.
Caution! Put the protector on the cutting zone.



11 Pull off the peel ejectors.



12 Unscrew the securing knobs of the pressing units. Take off the pressing units in pairs.



13 Clean the front zone of the machine, following the steps shown and removing all the particles which have adhered.



14 Remove the **waste trolleys** from the base to empty them.



15 Clean the inside of the podium, following the steps shown and removing all the particles which have adhered.

The cleaning process will be explained in details for each one of the machine's components below.

Instructions for cleaning the components

! Warnings and steps for cleaning and sanitation

It is necessary to clean all parts that come into contact with the juice each day.



All the parts, with the exception of the cover and the tap, can be put in a **dishwasher** to clean them.



The juicing zone and its removable components must be cleaned using **Citric Active***. Leave to act for one minute and then proceed to remove the remains of dirt with a moist sponge.

Do not use scourers which may scratch the surfaces.

** Detergent for food use specific to Zumex Juicers.*



Sanitise with a **hydroalcoholic disinfectant**** after the first rinse, and leave it to rest for 1 minute.



Rinse with plenty of water after sterilising, in order to remove any remaining disinfectant.



Dry the parts completely.

*** Disinfectant for food use recommended.*

Daily cleaning

Blade, sub-filter, bin, peel guides, feed plate, front cover, and tap



1 Spray the parts with Citric Active and allow it to work for 30 seconds.



2 Follow the cleaning process indicated, for all the parts: **blade, sub-filter, tank, peel chutes, etc.**



3 Clean the cover, following the steps shown and removing all the particles which have adhered.




4 Wash the **feeder plate** with Citric Active and a soft sponge, removing all the particles which have stuck to it.



5 Unscrew the top part of the tap by turning the matte ring, and clean the inside with the brush provided.


Instructions for cleaning the components

Automatic PulpOut System

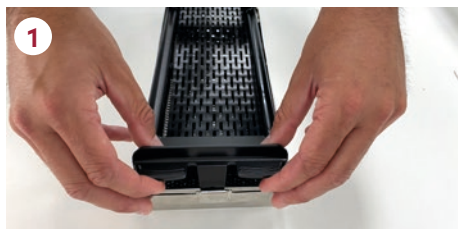


1

Remove the black **upper lid** by pushing upwards on the tabs sticking out.

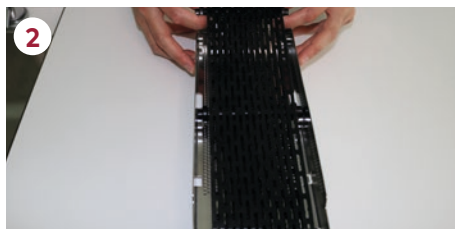

2

Turn the assembly around and place your fingers on the **sweeping belt** by pushing it outwards to release it.

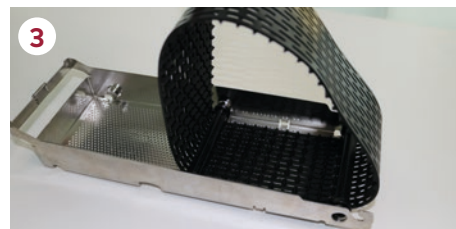

3

Remove the **sweeping belt** together with the other roller and remove both parts.



4

Clean the conveyor belt and the rest of the components of the Pulp Out with the cleaning steps indicated.




5

All the parts can also be washed in a **dishwasher**.


Assembly instructions

Automatic PulpOut System

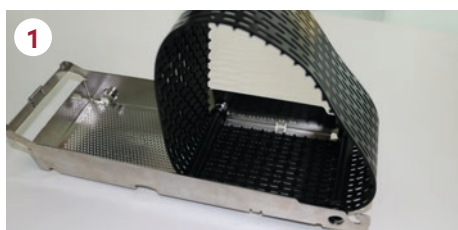


1

Insert the sweeping belt with the roller into the stainless steel tray.

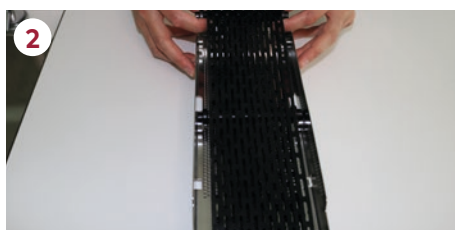

2

From the back, grab the belt and the other roller and pull towards the other end to place it on the guides.

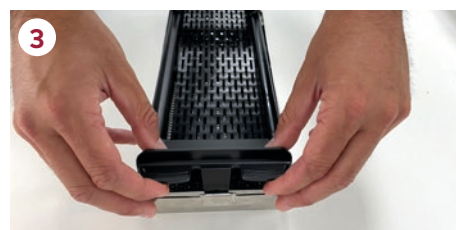

3

Place the top cover by lining up the pins with the grooves on the frame and pressing on the other end until it clips into place.

Recommended cleaning instructions

Midday cleaning

Cover, Juicing system and PulpOut system



1 Turn the knobs towards us counterclockwise to their vertical position and extract the side outlets.



2 Turn the knobs 90° degrees until they are aligned with the holes in the cover. Then extract it.



3 Take off the **automatic PulpOut System**, by lifting the assembly with the part closest to you.



4 Remove **the blade** by pressing on the centre and pulling the handle towards you. **Caution!** Put the protector on the cutting zone.




5 Pull off the peel ejectors.




6 Unscrew the securing knobs of the pressing units. Take off the pressing units in pairs.



7 Clean the front zone of the machine, following the steps shown and removing all the particles which have adhered.

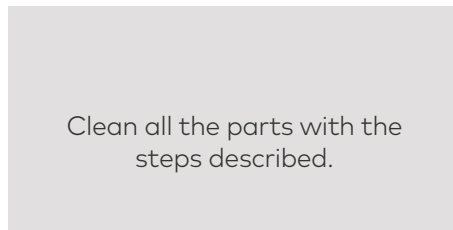

Clean all the parts with the steps described.

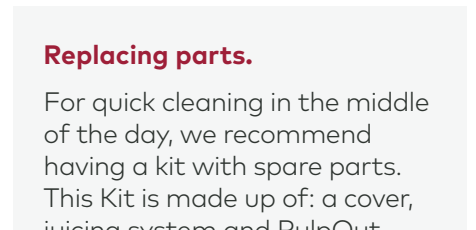

Replacing parts.

For quick cleaning in the middle of the day, we recommend having a kit with spare parts. This Kit is made up of: a cover, juicing system and PulpOut system.

Assembly instructions



1

Insert the filter tray.



2

Install the pressing units in pairs and screw on the wheels.



3

Put the peel ejectors in place on their supports.



4

Insert the blade by pressing down until it clips into place.



5

Clip the juice tray into place, making sure that the latches are facing outwards.



6

Place the stainless steel peel chutes on either end.



7

Place the tap next to the bottle holder and screw the two parts on.



8

Place the PulpOut system on the machine by attaching it to the guides.



9

Place the cover and turn the knob 90°.



10

Line up the bottom of the side outlet and lift up the upper part, ensuring that it closes by turning the knob 90°.



11

Insert the pulp cover.



12

Attach the feeder plate by screwing it onto the central knob.



13

Install the feeder basket.



14

Place the waste collection trays with new waste bags on the podium.